




SCHOTTKY BARRIER RECTIFIER




TO-220AB/CT




ITO-220 /FCT



TO-263/DC



TO-252/CS



FEATURES

Lead Free Package and Finish

- Low forward voltage
- High current capability
- High forward surge capability
- Low power losses, High efficiency
- Guarding for over voltage protection

APPLICATIONS

Low VF Schottky barrier rectifier are designed for high frequency, miniature switched mode power supplies such as adapters ,lighting and on-board DC/DC conerters

Primary Characteristic

I_O	2*10A
V_{RRM}	60V
I_{FSM}	300A
V_F	0.63V
T_{jmax}	150°C
Assembly code	X X

MECHANICAL DATA

- **Case:** Molded plastic
- **Polarity:** As marked
- **Mounting Position:** Any
- **Molded Plastic:** UL Flammability Classification Rating 94V-0
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Solder bath temperature 275°C maximum, 10s per JESD 22-

Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified

Characteristics	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	60	V
Working Peak Reverse Voltage	V_{RWM}	60	V
Maximum DC Blocking Voltage	V_{DC}	60	V
Maximum Average Forward Rectified Current	I_O	10	A
Per Leg		20	
Total			
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave	I_{FSM}	300	A
Operating Temperature Range	T_J	150	°C
Storage Temperature Range	T_{STG}	-40 to +150	°C
Typical Thermal Resistance (Note1)	$R_{\theta JC}$	2	°C/W
TO-220AB, TO-263, TO-252		4	
ITO-220			

Note1: Thermal resistance from Junction to case per leg mounted on heatsink.

Electrical Characteristics (Per Leg) unless otherwise specified

Characteristics		Symbol	Value		Unit
Forward Voltage Drop(Note2)		V _F	Typ.	Max.	V
at I _F =3A	TA=25°C		0.51	-	
	TA=125°C		0.45	-	
at I _F =5A	TA=25°C		0.59	-	
	TA=125°C		0.53	-	
at I _F =10A	TA=25°C		0.72	0.78	
	TA=125°C		0.63	-	
Maximum Reverse Current at V _R =60V	TA=25°C	I _R	3	50	μA
	TA=125°C		2	-	mA

Note2: Pulse test: 300 μs pulse width, 1 % duty cycle

RATINGS AND CHARACTERISTIC CURVES

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

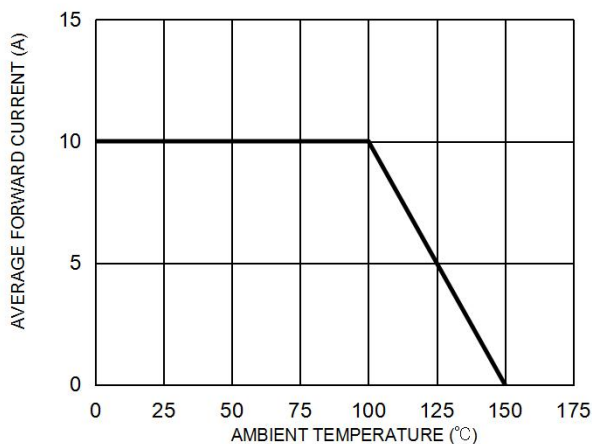


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

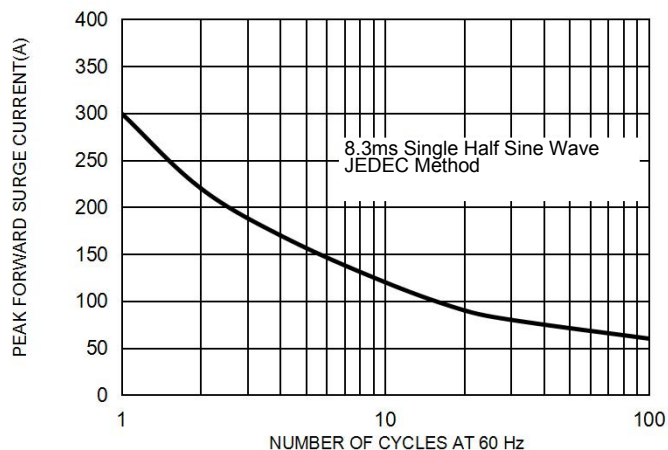


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG


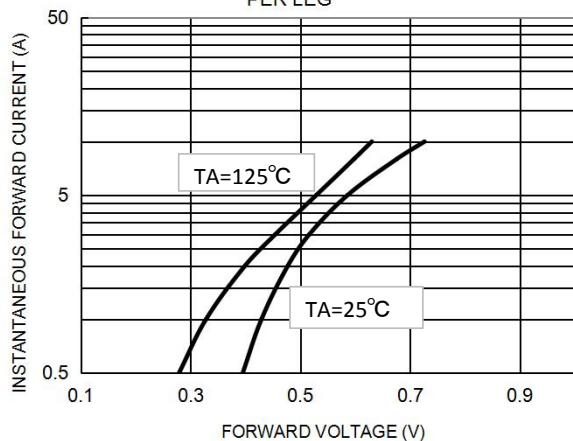



FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

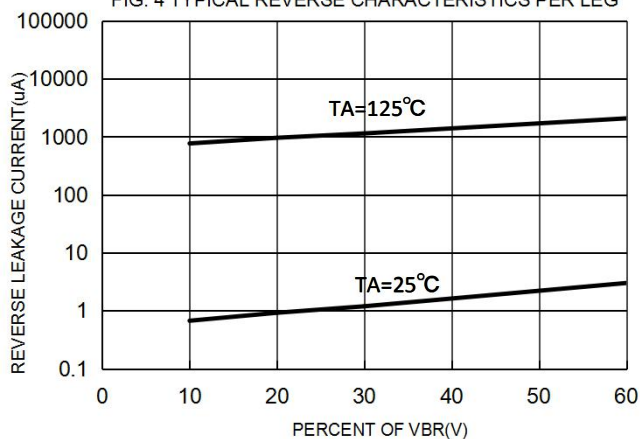


Ordering information

Part Number	Package	Unit Weight	Base Quantity	Delivery mode
MBR2060CT	TO-220AB	0.07oz(1.96g)	50 pcs / tube	1000pcs/box 5000pcs/carton
MBRF2060CT	ITO-220	0.06oz(1.74g)	50 pcs / tube	1000pcs/box 5000pcs/carton
MBRS2060CT	TO-263	0.04oz(1.16g)	50 pcs / tube	1000pcs/box 5000pcs/carton
MBRD2060 CT	TO-252	0.04oz(1.16g)	800 pcs / reel	800pcs/box 4000pcs/carton


TO-220AB

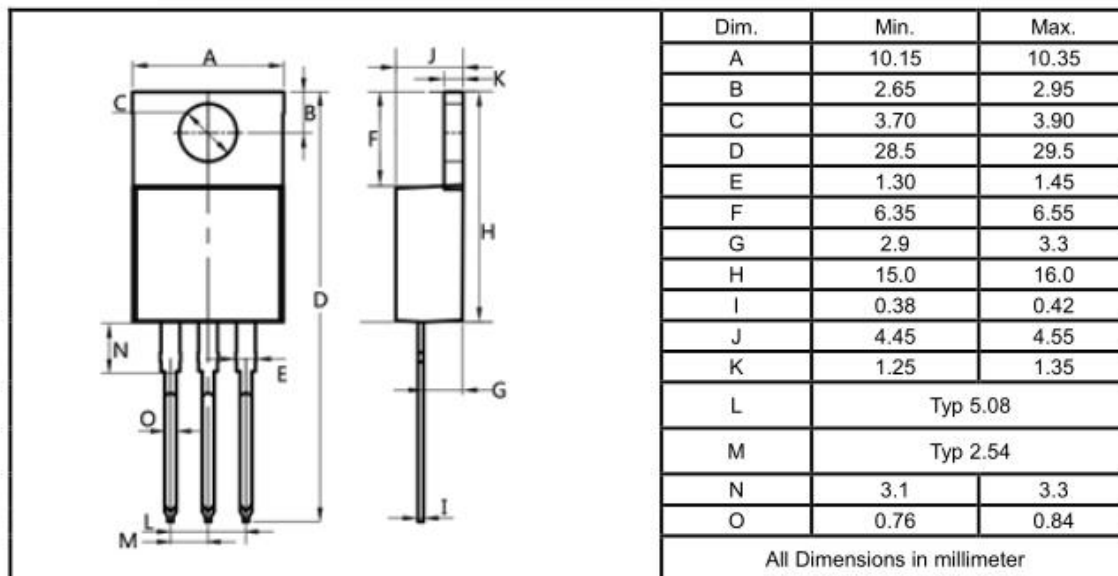

ITO-220

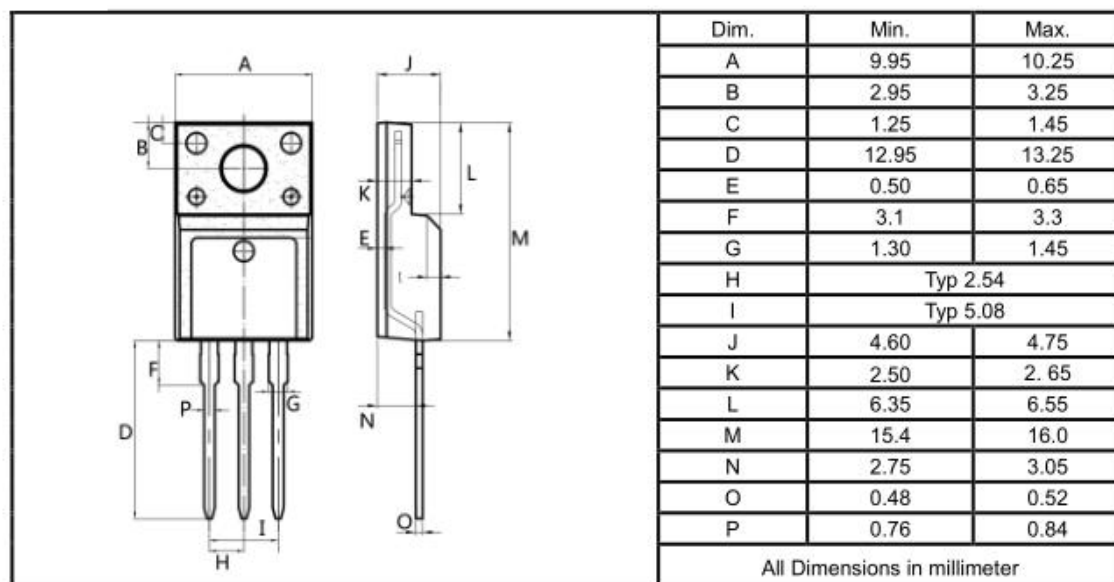

TO-263

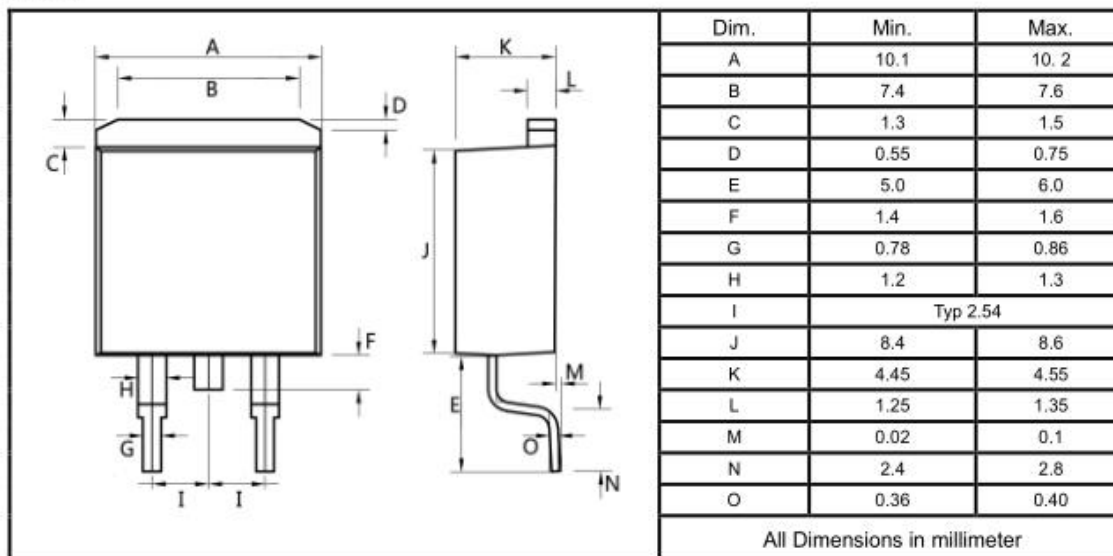

TO-252

